




ΜΙΧΑΗΛΙΔΗΣ Σ. & Ε. & ΣΙΑ Ο.Ε.

ΑΘΗΝΑ : Περικλέους 22, ΤΚ-10562, Σύνταγμα,
▲ Τηλ. 210/3242270, Fax. 210/3255457
e-mail : sales@michailidis.com.gr

ΣΥΣΚΕΥΗ ΑΤΜΟΥ LSE 6

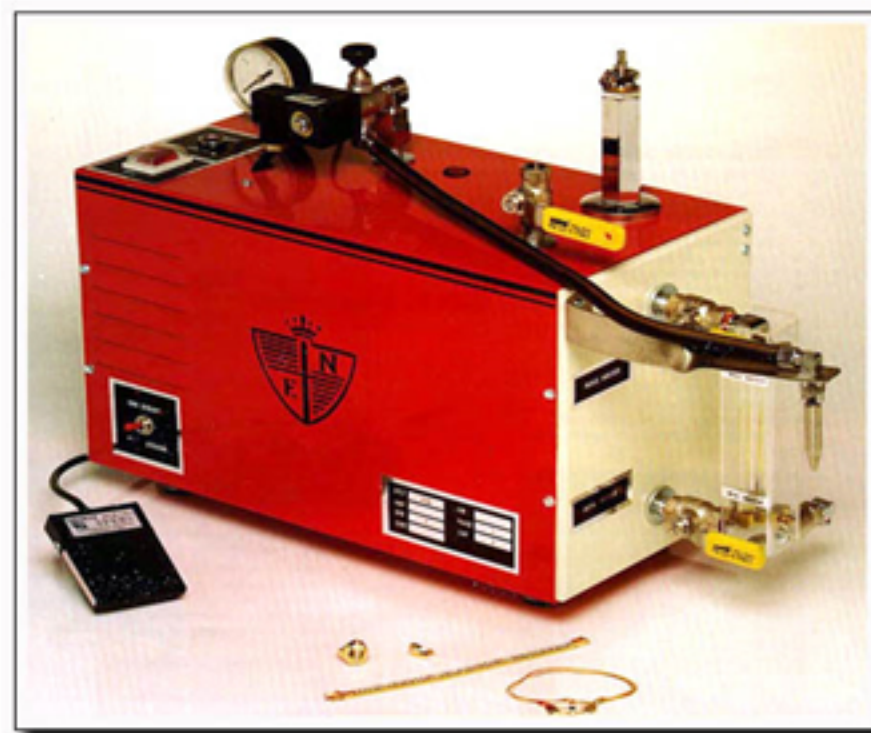

Features

Compact (25 cms high * 21 cms wide * 42 cms long). Light (16.5kgs) and portable .
Shipped fully assembled and pretested.
No special installation required.
Plugs into any 110 or 220 volt electrical outlet.
A short delay between switching and operational readiness.
High pressure steam 7 bar (100 P.S.I)
No drop in steam pressure after operation.
Automatic steam release (solenoid) valve.
Automatic safety valve.
Conventional water intake funnel.
6 liters (1.5 gallon) capacity .
water level sight glass (with protective rods).
Automatic switch when reaches element

□ Long -life, low watt density heating element. Steam cleaning cycle neon indicating light. Easy to read pressure gauge Pressure regulation. Water outlet tap. Easy to handle steam nozzle. Electric switch for selection of steam operation. Operational heating cycle neon indication light. Electrical foot actuated steam release switch. Specially treated for maximum protection against rust and corrosion. All parts and workmanship FULLY GUARANTEED.